



Measuring for Replacement Spring Axles

Straight Axle

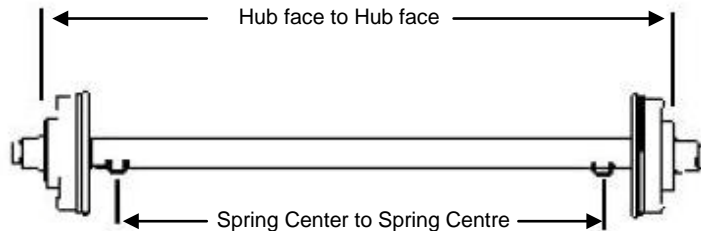

4" Drop Axle

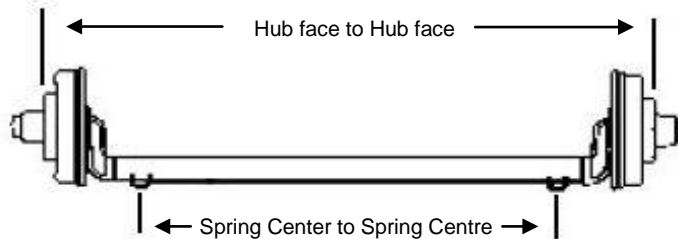

Date: _____

PO# _____

Customer Name: _____ Contact _____

Telephone: _____ Fax: _____

Capacity (2000LB, 3500LB, 6000LB, 7000LB, etc) _____

Lube Type _____

(Grease, EZ or Nev-r- lube Oil Bath)

Bolt Pattern (4 Bolt, 5 Bolt*, 6 Bolt, 8 Bolt) _____

Stud Size _____

(1/2", 9/16" Etc)

Hub face to Hub face _____

Quantity _____

Brake Type _____

(Idler, Electric, Hydraulic, Hydraulic Free Backing, Etc)

Straight _____ 4" Drop _____

Spring Center to Spring Center _____

Beam Diameter (1 3/4", 2 3/8", 3", Etc) _____

Under slung or Over slung _____

(Springs mounted under axle or over axle)

Other Information _____

***Please Note**

Standard 5 bolt pattern on trailer axles is **5 on 4 1/2"** bolt circle.

There are also:

5 on 4 3/4"

5 on 5"

5 on 5 1/2"

Please ensure you order the correct 5 bolt pattern.

Fax Completed Form to **780-645-6506** or email to parts@trailercanada.com